

A better environment inside and out.®

Solar Gard Solar Control Window Films

Panorama Hilite 40

Performance results


	1/8" (3mm)	1/4" (6mm)	1/8"+1/8" (3mm+3mm)
Solar energy			
% Transmittance	27	26	24
% Absorptance	43	49	49
% Reflectance	30	25	27
Visible light			
% Transmittance	42	41	38
% Reflectance exterior	6	6	13
% Reflectance interior	7	7	8
Emissivity	.75	.75	.75
Winter U-Factor (BTU hr/ft ² °F)	.99	.98	.47
Shading coefficient	.46	.47	.55
Solar heat gain coefficient	.39	.40	.48
Solar selectivity index – luminous efficacy (VLT/SC)	.92	.89	.69
Light to solar heat gain factor (VLT/SHGC)	1.07	1.04	.79
% Ultraviolet light blocked @ 300 to 380 nm	99	<99	99
% Total solar energy rejected	61	60	52
% Summer solar heat gain reduction	54	51	37
% Glare reduction	53	53	53

Physical properties nominal

Gauge	3.0 mil (75 micron)
Tensile strength	30,000 lbs/in ² (2,110 kg/cm ²)

Film performance

Performance results were generated from testing 1/8" (3mm) thick clear glass.

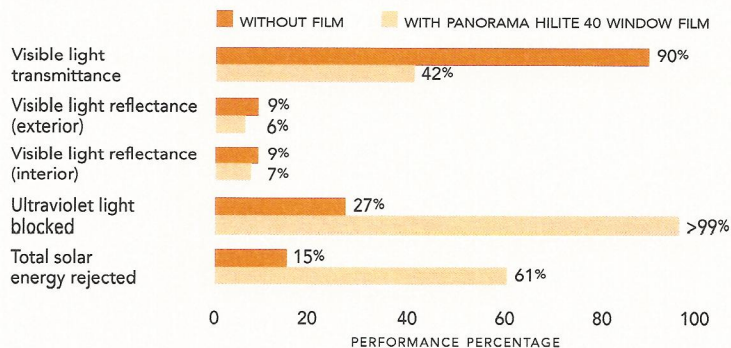

All performance results are based on the film installed on the inside surface of 1/8" (3mm), 1/4" (6mm), and 1/8"+1/8" (3mm+3mm) thick, clear glass.

Notes

- Solar Gard is a participating member of AIMCAL (the Association of Industrial Metallizers, Coaters and Laminators), IWFA, and EWFA. Performance results are calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.
- These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Solar Gard's limited warranty should be carefully reviewed prior to purchasing any Solar Gard product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Solar Gard shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Solar Gard has no control.
- Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

www.solargard.com/us

SK0314PANHL4 03/12

© Copyright 2012, Saint-Gobain Performance Plastics Corporation and/or its affiliates • All Rights Reserved • www.solargard.com

Please recycle





GENERAL INFORMATION	
Manufacturer:	Bekaert Specialty Films, LLC
CPD Number:	BSF-K-042
Film Location:	Interior
Film Tint:	Gray
Film MFR Series:	Hilite 40 (Int Applied)

RATINGS INFORMATION						
Operator Type	Default Glazing Reference	SHGC No Film	SHGC with Film	VT No Film	VT with Film	U-Factor
Fixed	3 mm (1/8in.) clear	0.72	0.34	0.74	0.34	1.042183
Fixed	3 mm (1/8in.) clear 3 mm (1/8in.) clear	0.64	0.41	0.67	0.31	0.686811
Window Wall	6 mm (1/4in.) clear	0.73	0.37	0.78	0.36	0.986955
Window Wall	6 mm (1/4in.) grey	0.52	0.37	0.39	0.31	1.001175
Window Wall	6 mm (1/4in.) clear 6 mm (1/4in.) clear	0.63	0.45	0.69	0.32	0.583751
Window Wall	6 mm (1/4in.) grey 6 mm (1/4in.) clear	0.41	0.31	0.35	0.16	0.583751